


TB53 / TB128

Thermal Transfer Overprinter

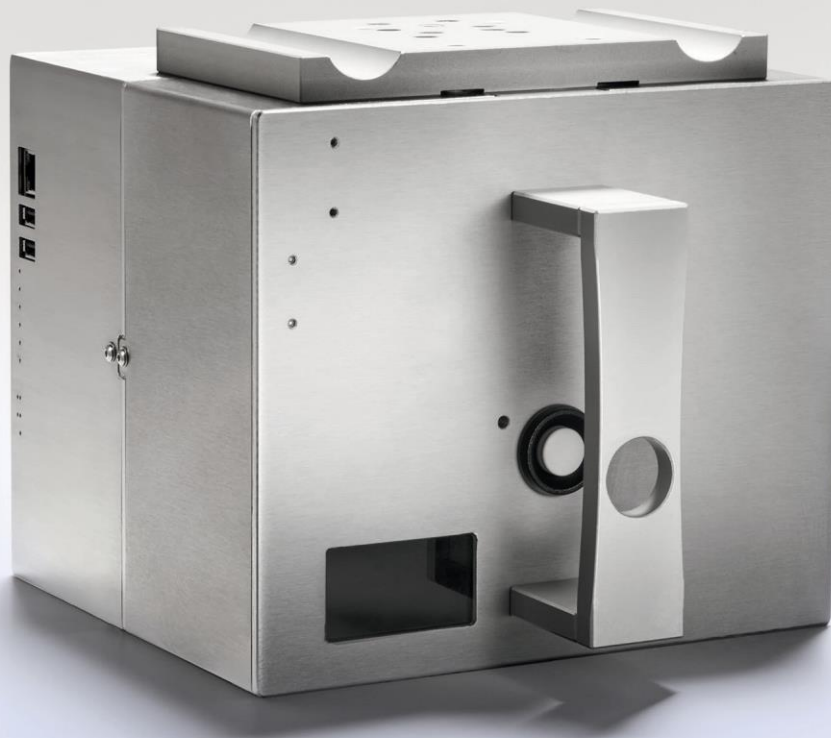

Codeink

Ωκεανού 19
56224 Θεσσαλονίκη Ελλάδα
2313117044
info@codeink.gr
www.codeink.gr

barban srl

TB53

Power Supply: 24 VDC 6A

Operating Temperature: 0 - 60 °C

Printhead: 53 mm 300 DPI (12 dots / mm)

Maximum ribbon length: 900 m

Ribbon Width: min 20 mm MAX 55 mm

Connections: Ethernet, Wifi, USB (backup + reset + upgrade)


Output: 2 relay outputs (Error / Warning)

Storage: 8 GB

Barcodes: QR, Code 128, EAN 2, EAN 5, EAN 8, EAN 13, ITF 14, UPC

Control System: Web App, Android App

Air requirement: 3,5 - 4,5 bar

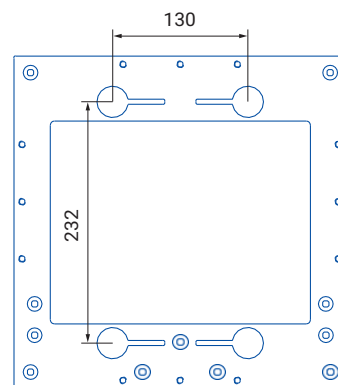

interassi di supporto
mounting bracket interaxes

| | TB53ix75 | TB53ix120 | TB53c |
|---------------|-------------------------------|-------------------------------|-------------------------------|
| Printing Mode | <i>Intermittent</i> | <i>Intermittent</i> | <i>Continuous</i> |
| Print Area | 53 x 75 mm | 53 x 120 mm | 53 x 200 mm |
| Print Speed | MAX 600 mm/s min 100 mm/s | MAX 600 mm/s min 100 mm/s | MAX 600 mm/s min 30 mm/s |
| Size | 220 mm x 205 mm H 184,5 mm | 265 mm x 205 mm H 184,5 mm | 220 mm x 205 mm H 184,5 mm |
| Weight | 9 Kg | 9,5 Kg | 9 Kg |

TB128

Power Supply: 24 VDC 14A

Operating Temperature: 0 - 60 °C

Printhead: 128 mm 300 DPI (12 dots / mm)

Maximum ribbon length: 600 m

Ribbon Width: min 55 mm MAX 130 mm

Connections: Ethernet, Wifi, USB (backup + reset + upgrade)


Output: 2 relay outputs (Error / Warning)

Storage: 16 GB

Barcodes: QR, Code 128, EAN 2, EAN 5, EAN 8, EAN 13, ITF 14, UPC

Control System: Web App, Android App

Air requirement: 3,5 - 4,5 bar

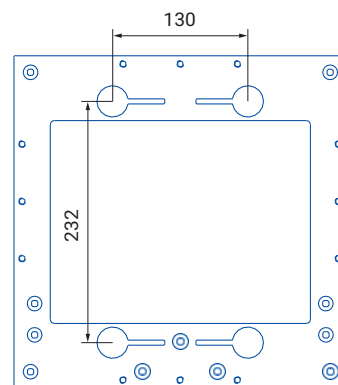

interassi di supporto
mounting bracket interaxes

| | TB128ix75 | TB128ix120 | TB128c |
|---------------|-------------------------------|-------------------------------|------------------------------|
| Printing Mode | <i>Intermittent</i> | <i>Intermittent</i> | <i>Continuous</i> |
| Print Area | 128 x 75 mm | 128 x 120 mm | 128 x 200 mm |
| Print Speed | MAX 600 mm/s min 100 mm/s | MAX 600 mm/s min 100 mm/s | MAX 600 mm/s min 30 mm/s |
| Size | 220 mm x 300 mm H 184,5 mm | 265 mm x 300 mm H 184,5 mm | 220 mm x 300 mm H 184,5mm |
| Weight | 9,6 Kg | 10,2 Kg | 9,6 Kg |