


TB53RUN / TB128RUN

Thermal Transfer Overprinter

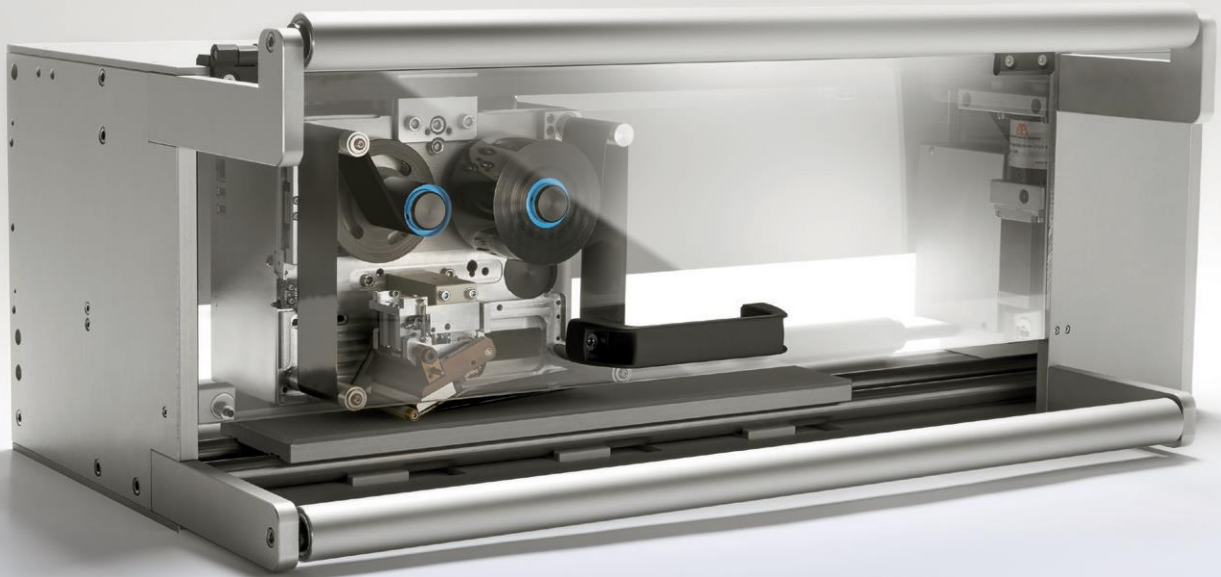

CODEINK

Ωκεανού 19
56224 Θεσσαλονίκη Ελλάδα
2313 11 70 44
info@codeink.gr
www.codeink.gr

barban srl

TB53RUN

Power Supply: 24 VDC 6A

Operating Temperature: 0 - 60 °C

Printhead: 53 mm 300 DPI (12 dots / mm)

Maximum ribbon length: 900 m

Ribbon Width: min 20 mm MAX 55 mm

Connections: Ethernet, Wifi, USB (backup + reset + upgrade)

Output: 2 relay outputs (Error / Warning)

Storage: 8 GB

Barcodes: QR, Code 128, EAN 2, EAN 5, EAN 8, EAN 13, ITF 14, UPC

Control System: Web App, Android App

Air requirement: 3,5 - 4,5 bar

Size	400 mm	600mm
Print Area	53 x 400 mm	53 x 600 mm
Print Speed	MAX 400 mm/s min 100 mm/s	MAX 400 mm/s min 100 mm/s
Size	803 mm x 270 mm H 265 mm	1003 mm x 270 mm H 265mm
Weight	14 Kg	15 Kg

TB128RUN

Power Supply: 24 VDC 14A

Operating Temperature: 0 - 60 °C

Printhead: 128 mm 300 DPI (12 dots / mm)

Maximum ribbon length: 600 m

Ribbon Width: min 55 mm MAX 130 mm

Connections: Ethernet, Wifi, USB (backup + reset + upgrade)

Output: 2 relay outputs (Error / Warning)

Storage: 16 GB

Barcodes: QR, Code 128, EAN 2, EAN 5, EAN 8, EAN 13, ITF 14, UPC

Control System: Web App, Android App

Air requirement: 3,5 - 4,5 bar

Size	400 mm	600mm
Print Area	128 x 400 mm	128 x 600 mm
Print Speed	MAX 400 mm/s min 100 mm/s	MAX 400 mm/s min 100 mm/s
Size	803 mm x 340 mm H 265 mm	1003 mm x 340 mm H 265mm
Weight	14,5 Kg	15,5 Kg